

**PIARCO INTERNATIONAL NOTAM OFFICE****AIP
SUPPLEMENT**

Tele: 1 868 669-4128
1 868 668-8222 ext 2510
FAX: 1 868 669 1716
AFTN: TTPPYNYX
Email:aimpublication@caa.gov.tt

TRINIDAD & TOBAGO
CIVIL AVIATION AUTHORITY,
P.O. BOX 2163, NATIONAL MAIL CENTRE, PIARCO
REPUBLIC OF TRINIDAD AND TOBAGO

31/26
29 JUN 26

AD**31. OIL NUT BAY HELIPORT (TUON)****Establishment of Heliport Chart - ICAO and VFR Chart - ICAO at the Oil Nut Bay Heliport****Effective: 260629 to PERM**

A Heliport Chart – ICAO and a VFR Chart – ICAO have been established for Oil Nut Bay Heliport.

Please see the following attachments:

Attachment A - Heliport Chart - ICAO and

Attachment B - VFR Chart - ICAO

Please be advised that these charts replace the diagrams that are published in the Eastern Caribbean AIP pages AD 3.1-7 and AD 3.1-8.

END

Intentionally left blank

ATTACHMENT A

**HELIPORT
CHART - ICAO**

ARP 18°30'03"N 064°20'35"W


AD ELEV 1FT

**Oil Nut Bay Heliport
Virgin Gorda
British Virgin Islands**

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS84) at the stated position	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL	13
HEIGHTS IN FEET ABOVE AD	(12)

ATS COMMUNICATION FACILITIES			
Service	Call Sign	Channel	Remarks
APP	San Juan Approach	132.25MHz	Primary frequency Emergency frequency
TWR	Beef Island Tower	118.400MHz	Primary frequency Secondary frequency
ATIS	Beef Island Tower	127.750MHz	

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS				
APRON/RWY/TWY	SURFACE	BEARING STRENGTH	DIMENSION	SLOPE
TDPC	Concrete	-	6.92m diameter	2%
TLOF	Concrete	4,700 kg	13.81m diameter	2%
FATO	Concrete	-	25m diameter	2%
Safety Area	Concrete and Grass	-	28m diameter	2%

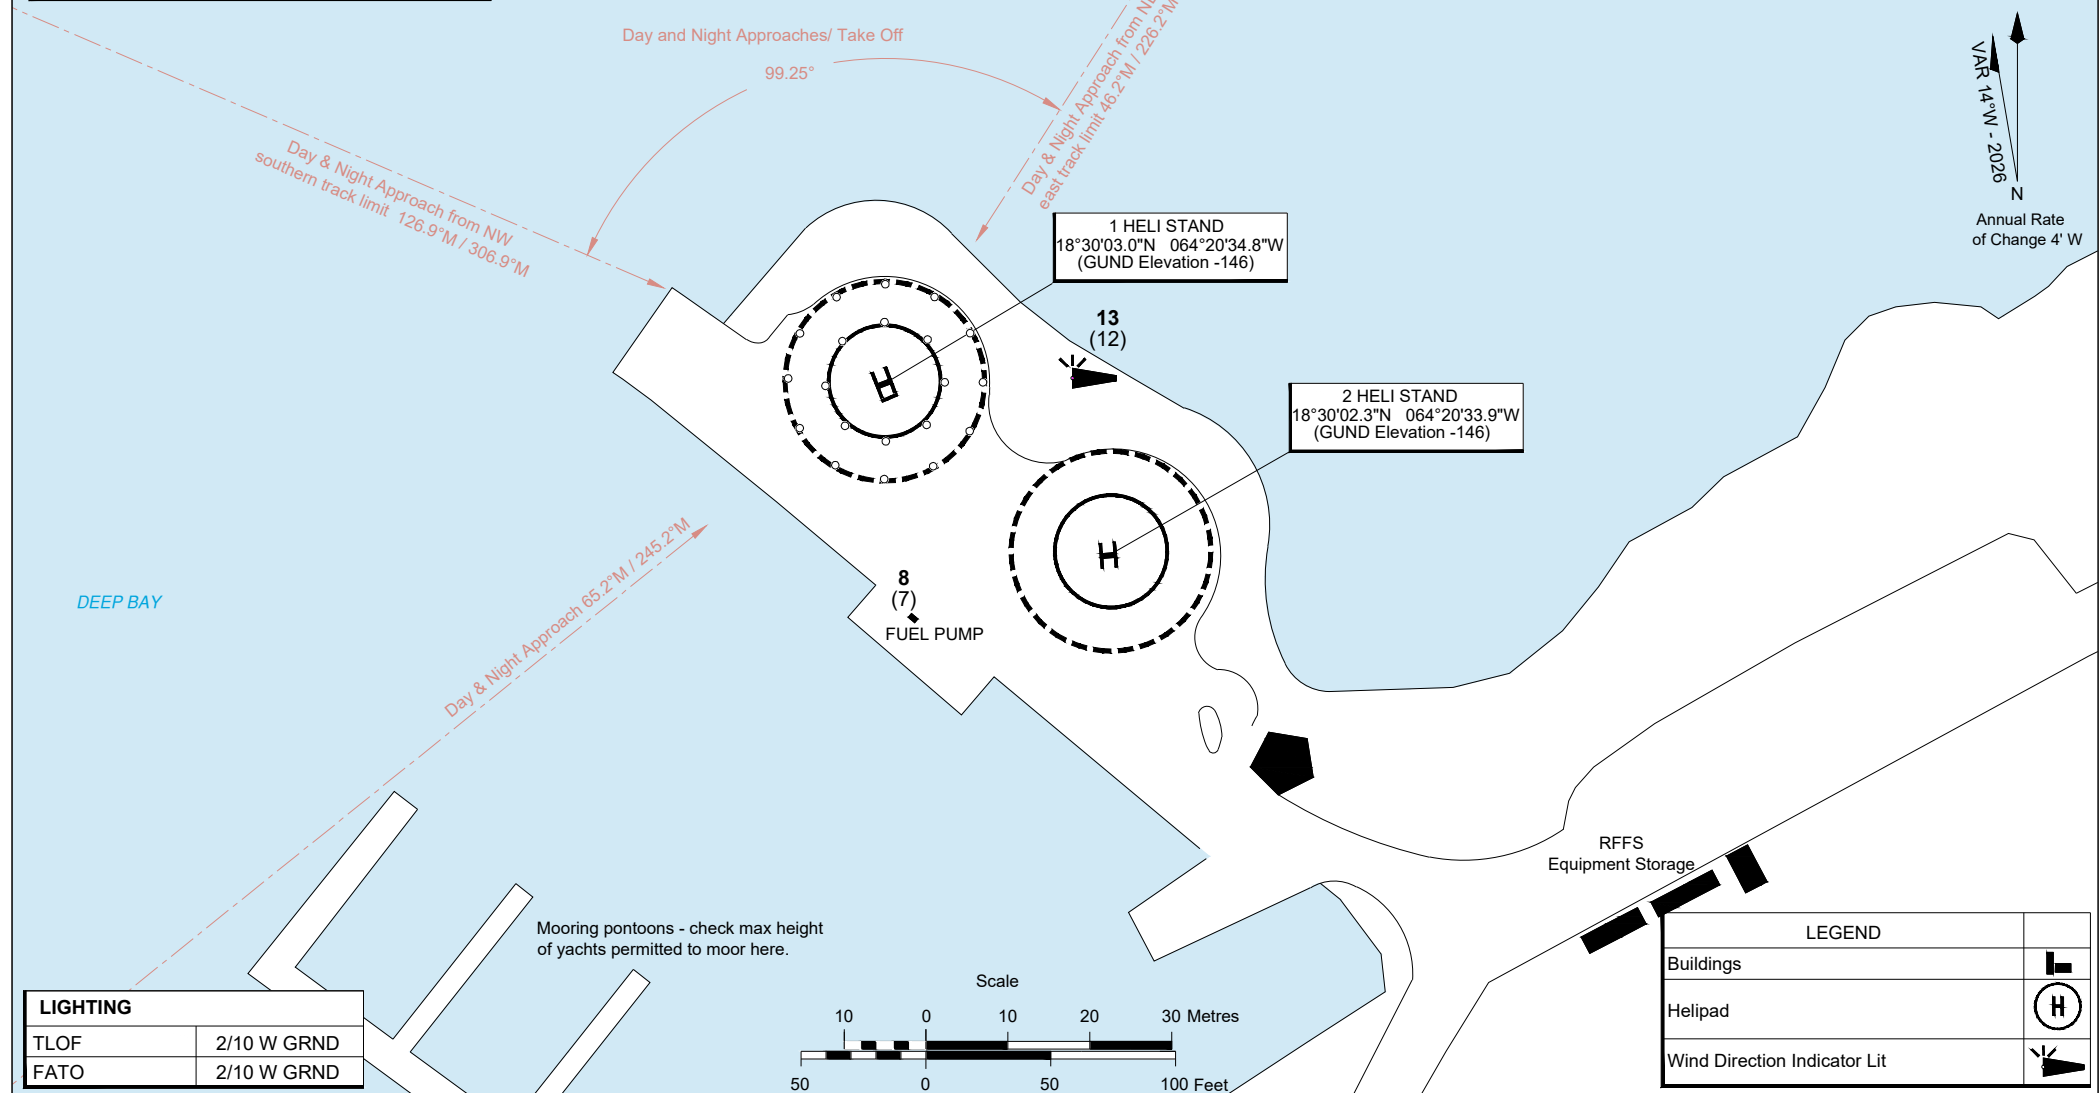

LIGHTING	
TLOF	2/10 W GRND
FATO	2/10 W GRND

LEGEND	
Buildings	
Helipad	
Wind Direction Indicator Lit	

Intentionally left blank

LEGEND

Name of Aerodrome **OIL NUT BAY HELIPORT**
 ICAO **(TUON)**
1 L H

Elevation

Lighting in operation

Runway hard surfaced

Aerodrome

Heliport

Compulsory reporting point

CTR control zone

Spot elevation 449


Elevation of top 473

Obstacle

ATS COMMUNICATION FACILITIES			
Service	Call Sign	Channel	Remarks
APP	San Juan Approach	132.25MHz	Primary frequency Emergency frequency
TWR	Beef Island Tower	118.400MHz	Primary frequency Secondary frequency
ATIS	Beef Island Tower	127.750MHz	

ELEV IN FEET
DISTANCES IN FEET
BRG ARE MAG


VAR 14°W - 2026
 Annual Rate of Change 4' W

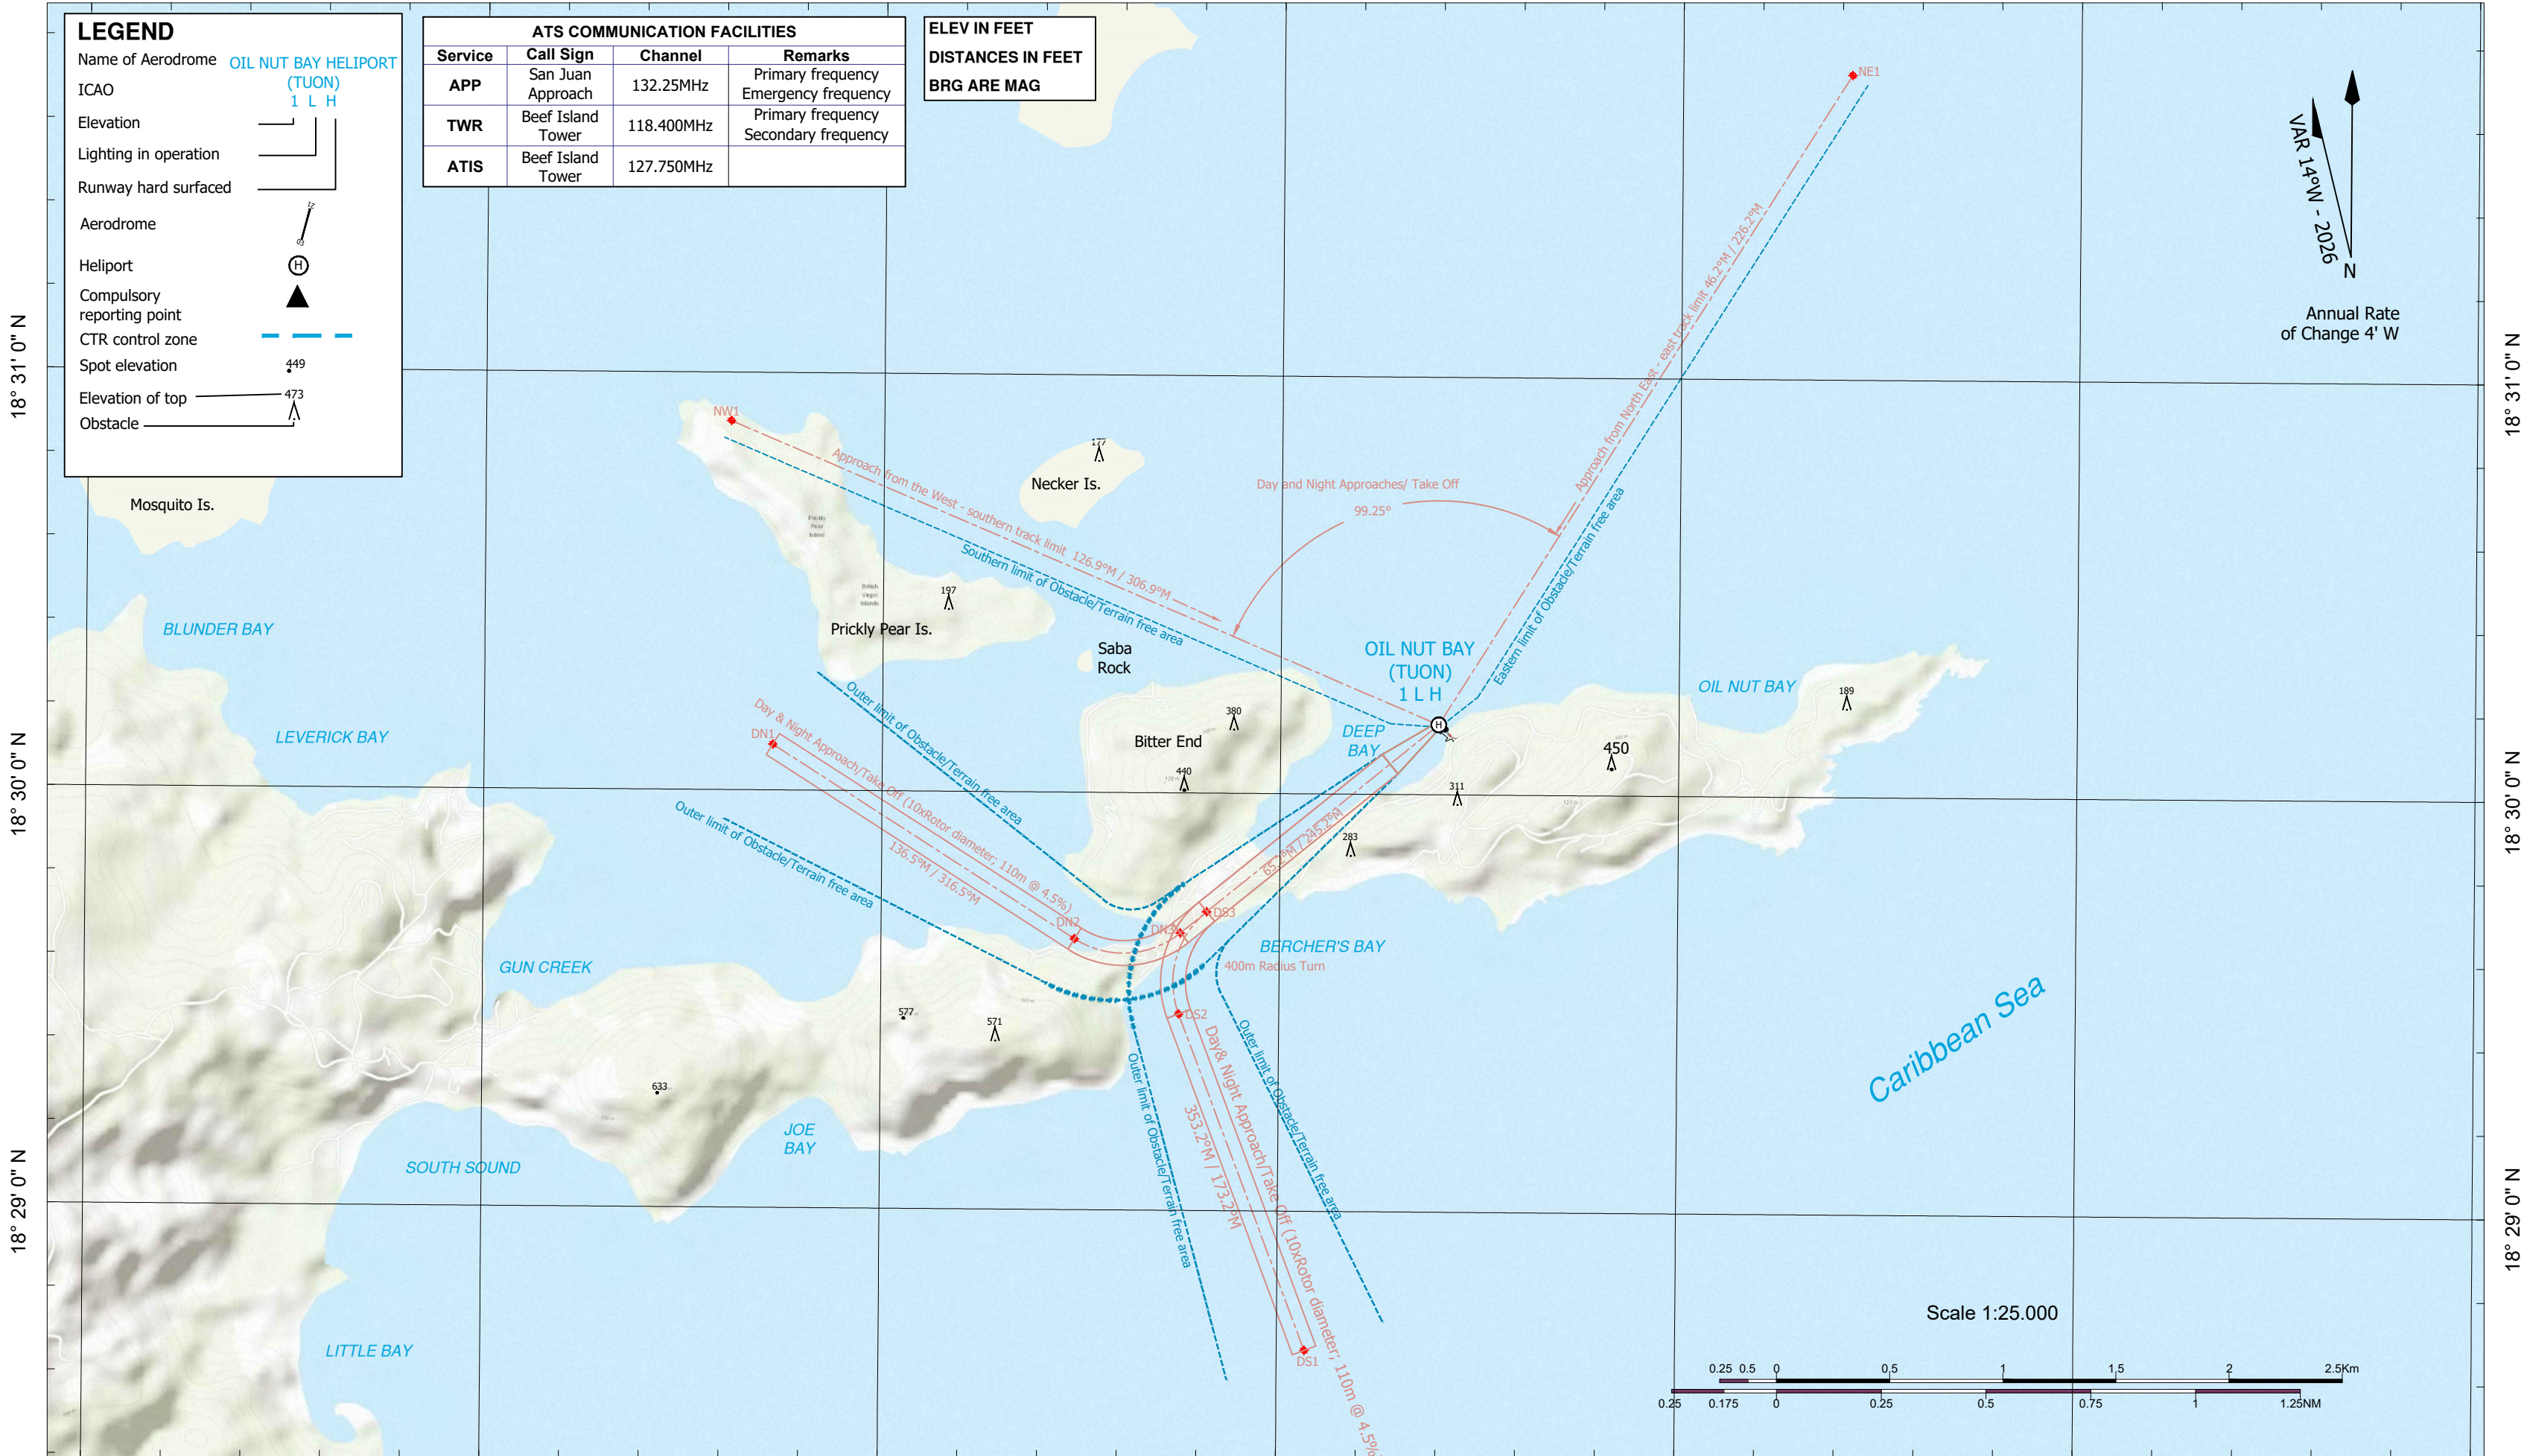

18° 31' 0" N
 18° 30' 0" N
 18° 29' 0" N

18° 31' 0" N
 18° 30' 0" N
 18° 29' 0" N

64° 24' 0" W 64° 23' 0" W 64° 22' 0" W 64° 21' 0" W 64° 20' 0" W 64° 19' 0" W 64° 18' 0" W

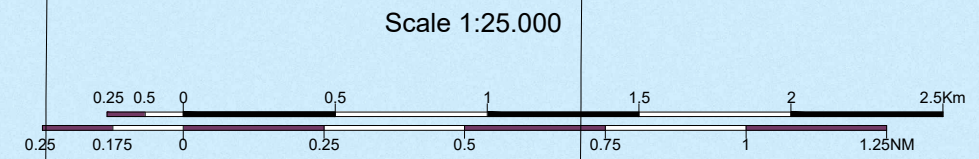

Intentionally left blank